

19" (18.5" viewable) 16:9 widescreen LED monitor



VA1921a-2



The ViewSonic VA1921a-2 is a 19"(18.5" viewable) LED monitor which is the ideal choice for corporate, educational or home office use. In addition to a 16:9 widescreen and energy saving Eco mode, it is also equipped with ViewSonic's exclusive ViewMode, providing intuitive presets that deliver optimized screen performance in different applications. Besides, Flicker-Free technology and a Blue Light Filter help to eliminate eye strain from extended viewing periods for improved productivity. Lastly a VESA-compatible mount adapt easily to multi-monitor or wall-mount set ups.

16:9 Widescreen Optimized for Content Reviewing

Equipped with a 16:9 aspect ratio and 1366x768 native resolution, this monitor is designed for multitasking and improving productivity in the

ViewMode: Superior Color Rendering & Intuitive Settings

ViewSonic's unique ViewMode feature offers "Game," "Movie," "Web," "Text," and "Mono" presets. These presets enhance gamma curve,

workplace or at home.



Enhanced Viewing Comfort

Flicker-Free technology and a Blue Light Filter help to eliminate eye strain from extended viewing periods.




color temperature, contrast, and brightness to deliver an optimized viewing experience for different screen applications.



Eco-mode conserves more energy and cuts costs

ViewSonic's proprietary Eco-mode energy-saving feature is built into all ViewSonic LED monitors. Eco-mode adjusts brightness and improves visibility, while reducing eye fatigue and prolonging the monitor's lamp life. With Eco-mode, the lifespan of the LED backlighting is also greatly increased.

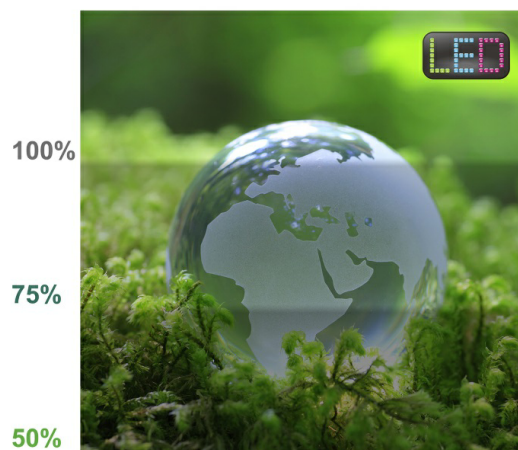

VESA-Compatible Mount Design

Mount the monitor as you see fit using its convenient 75x75mm VESA-mountable design.



Technical Specifications

LCD PANEL	Type	19" (18.5" Viewable) TN Type, a-si TFT Active Matrix LCD
	Display Area	409.8 x 230.4 mm
	Resolution	1366 x 768
	Brightness	200 cd/m ² (Typ)
	Contrast Ratio	600:1 (typ)
	Viewing Angles	90° (H) / 65° (V)
	Response Time	5ms
	Backlight	WLED light bar
	Backlight Life	30,000 Hrs (Min)
	Colours	16.7M colors (6-bit+Hi-FRC)
	Panel Surface	Anti-Glare type, Hard-coating (3H)
INPUT SIGNAL	Frequency	24 ~82 kHz / 50 ~75 Hz
	Sync	Separate Sync
COMPATIBILITY	PC	1366x768 (Non-Interlaced)
	Mac	1366x768
CONNECTOR	Analog	VGA x 1
POWER	Power	Internal Power Board
	Voltage	AC 100-240V (Universal); 50/60 Hz
	Consumption	15.3W; Optimize: 12.5W (Typ.); Conserve: 9.5W (Typ.)
ERGONOMICS	Tilt	-3° ~ 18°
WALL MOUNT	VESA®	75x75 mm
OPERATING CONDITIONS	Temperature	32°F to 104°F (0°C to 40°C)
	Humidity	10% to 90% (no condensation)

DIMENSIONS	Physical with stand	437.8 x 344.4 x 171.3 mm
WEIGHT	Net with stand	2.02kg
REGULATIONS		CCC
PACKAGE CONTENTS		LCD Display / Power Cable / D-Sub Video Cable / Quick Start Guide

03222016