

27" Frameless MHL Full HD Display. Projection your smartphone/tablet to large display



VX2770Sml-LED



With a sleek AH-IPS panel, the ViewSonic VX2770Sml-LED display looks as good as it performs. Full HD resolution, an impressive 30 million:1 Dynamic Contrast Ratio, and super-wide viewing angles all wrapped in a sexy frameless design. The VX2770Sml-LED also provides versatile connectivity options with MHL (Mobile High-Definition Link), HDMI and VGA, making it ideal for home entertainment, office use, and color-critical applications.

MHL 2.0 connection

The MHL and HDMI connections share the same ports, providing the VX2770Sml-LED flawless streaming from a variety of MHL and HDMI-equipped media devices. These include mobile devices, computers, set-top boxes, Blu-ray disc

Frameless and slim design with intuitive touch keys

The frameless bezel on the VX2770Sml-LED removes the boundary between the real and virtual worlds, featuring an elegant and glossy finish to enhance any home or office setting. The sleek and

players, HD digital cameras, and gaming consoles. The MHL connection allows your mobile devices to use this monitor without turning on a PC/Laptop.



SuperClear™ AH-IPS for Super Wide Viewing Angles

The industry-leading SuperClear™ AH-IPS Wide Viewing Angles technology delivers a 178° viewing angle from horizontal and vertical directions, while ensuring the vibrancy and accuracy of images. Brightness levels are consistent across the viewing angles, with no distortion or decay.



30,000,000:1 dynamic contrast ratio for clear, sharp images


The superior dynamic contrast ratio of 30,000,000:1 delivers a broader range of grayscale, with darker blacks and brighter whites, while ensuring everything in between is depicted with explicit detail, for a rich and natural image.

seamless touch function key provides a simple and intuitive touch experience, making screen adjustments fast and easy.



Full HD 1080p delivers perfect resolution

Brilliant pixel quality of the 1920x1080 Full HD panel reproduces refined and natural image quality to meet the requirements of computer applications of businesses, graphic design, video production, gaming, and HD video entertainment.

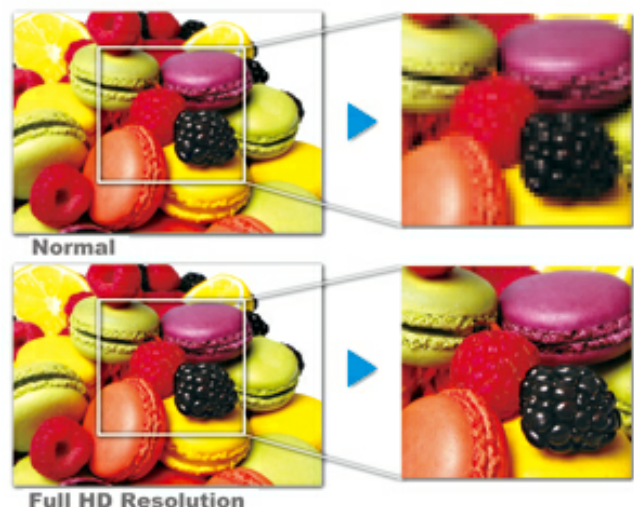

On-Live SRS Premium Sound® surrounding stereo

The dual 1.5-Watt speakers, powered by SRS Premium Sound® surround stereo, delivers an audiophile sound quality for anyone seeking a supreme audio performance and gaming experience. This eliminates the need for external speakers, thus optimizing desk space for better comfort.



Normal



Dynamic Contrast Ratio



HDMI Input for High Definition Presentations

Multi-mode input technology supports both digital (HDMI) and analog (VGA) signals for ultimate compatibility and configuration flexibility.



Planet-Friendly LED Backlighting and Eco-Mode

Embedded mercury-free LED backlighting and Eco-mode features energy-saving with the three-phase self-adjusted power-saving mode. VX2770sml-LED enhances display performance by delivering an outstanding color range, contrast ratio and brightness output for remarkably defined images.



Standard 100%



Optimize 85%



Conserve 70%

Technical Specifications

LCD	Type	27" Wide
	Display Area	27 inch
	Optimum Resolution	1920x1080
	Contrast Ratio	1,000:1 (typical), 30,000,000:1 (DCR)
	Brightness	250 cd/m ² (typ)
	Viewing Angles	178° / 178°
	Response Time	4ms (GTG fastest), 7ms (GTG typical)
	Panel Surface	Anti-glare Type, 3H Hardness
	Light Source	30,000 Hrs (Min.)
Video Input	Analog	RGB Analog (75Ω, 0.7 / 1.0 Vp-p)
	Digital	HDMI (MHL)x2
	Frequency	Fh: 24-82KHz; Fv: 50-75Hz
	Sync	Separate Sync / Composite Sync / SOG
Compatibility	PC	VGA up to 1920x1080 non-interlaced
	Mac	MAC up to 1920x1080
Connector	Analog	RGB Analog (75Ω, 0.7 / 1.0 Vp-p)

	Digital	HDMI (TMDS, 100 ohms) 1.4 x2 MHL: Share with HDMI
	Audio	Audio In: 3.5mm Headphone Jack x 1 Audio Out: 3.5mm Headphone Jack x 1
	Power	External Power Adapter x1
Audio	Speakers	1.5W *2 (SRS premium)
Power	Voltage	AC 100 - 240V(Universal); 50 / 60 Hz
	Consumption	(ECO Mode) Standard: 30W; Optimize: 27W; Conserve: 23W
Operating Conditions	Temperature	0 - 40 (° C) 32-104(° F)
	Humidity	10%-90% (non-condensing)
Dimensions	Physical	622.29mm (width) x 459.3mm (height) x 192.5mm (depth)
Weight	Net	5.0 kg
Regulations		CE, CB, BSMI, SASO, C-tick, UL/cUL, FCC-B (including ICES003), TUV-S, UL CoC, Mexico Energy, GOSTR/Hygienic, UkrSEPRO, Erp, CCC, China Energy, Energy Star 5.2, EPEAT Silver, WEEE, RoHS, SVHC list
Package Contents		AC/DC Adaptor *1, Power Cable *1, Audio Cable *1, VGA Cable*1, HDMI Cable *1, Quick Start Guide *1, ViewSonic CD Wizard *1

10052016