

Impressive Audiovisual Performance for Education Application



PJD5350LS



3,200 Lumens XGA Short Throw Projector


The ViewSonic LightStream™ PJD5350LS short throw projector features 3,200 lumens with a 20,000:1 contrast ratio, native XGA 1024 x 768 resolution, user-friendly design, and a sleek white chassis. Exclusive SuperColor™ 6-Segment Color Wheel maximizes color saturation and brightness for true-to-life image projection, while SonicExpert™ technology delivers improved sound quality. A short throw lens with a 0.6 throw ratio offers large projection images for smaller rooms. The PJD5350LS also features HDMI and VGA

connectivity, and a RS232 control port. An energy-saving DynamicEco® feature reduces power consumption by up to 70%, and extends the lamp life by up to 10,000 hours. With advanced audiovisual features and flexible connectivity options, the PJD5350LS is ideal for use in education and small business environments.

SuperColor™: Best in Class Color Accuracy

ViewSonic's proprietary SuperColor™ Technology offers a wider color range than conventional DLP projectors for true-to-life color performance in any light. SuperColor™ 6-Segment Color Wheel maximizes brightness Increased by 15% or more with the highest color saturation over others in the same class.

ViewSonic
SuperColor™
6-Segment Color Wheel

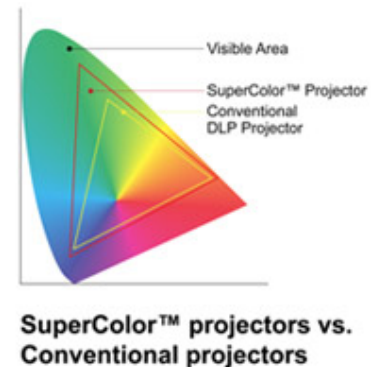

Short Throw Options for large projections in small places

The short throw lens enables large images to be projected from short distances in small rooms. This means there are no distracting shadows on the projected image, and no blinding lights in the eyes of presenters.



3D Blu-ray Ready HDMI

Equipped with the latest HDMI, this projector can display 3D images directly from 3D Blu-ray players—perfect for connecting to any HDMI-enabled devices such as PCs, laptops, tablets, and media players.



Color Mode Best view modes

Providing 5 view modes for different scenarios,

SonicExpert™ Technology Clear,

users can choose one fit mode at once for best view according to the projection environment. These 5 modes are: - Brightest Mode: for environments where extra-high brightness is required - Dynamic Mode: for presentations under daylight environment and text content - Standard Mode: for matching PC or NB color, - ViewMatch Mode: for general viewing - Movie Mode: for watching movies with better saturation in a dark environment



comfortable, and louder sound over same-class projectors

Following a groundbreaking proprietary speaker transducer and chamber re-design, LightStream projectors deliver full-range sound 20Hz – 20KHz for presentations or off-the-clock home entertainment. The compact speaker takes pride in quality sound with best-fit Sound Response Curve, and high efficiency of transferring electric power to sound power. They sound stronger, offering more concentration, letting sound travel farther. The 2-watt Cube speaker is powerful enough to fill you meeting room with wall-to-wall sound – an improvement over the speakers of competing products in the same class.



Ease Access Lamp

The thoughtfully designed lamp door makes lamp maintenance and replacement easy. Located at the top of the projector, there's no need to dismantle the projector, even if it's hanging from the ceiling, to access the lamp. This user-friendly design saves time and effort for maintenance personnel in businesses and schools, and is easy enough that just about anyone can do it.



Do It All with a Single Remote Control

My Button A programmable hotkey “MyButton” can be configured to launch the most commonly used functions. 1-to-8 Projector Control A single remote control can also control up to eight projectors in the same venue. App – vRemote A Free vRemote app also allows users to control a projector via a mobile device.





App- ProjectorDistance App for Quick Projector Position Preview

No matter small meeting room, middle classroom, or big hall, ProjectorDistance tells you how far the projector should be placed according to the room ceiling height, projector's screen size, aspect ratio, etc. Just input several figures, the result will be displayed in the simulation scenarios with measurement. You can use finger to adjust the distance instantly.



***App - vRemote App controller with snapshot keystone and lamp life monitor**

Never worry about missing a remote control again! Users can download vRemote, the virtual remote control, onto any IR-enabled smartphone. If there is no IR function on smartphone, users can also plug in USB wireless adapter (PJ-WPD-200) into projectors, then users can have their Android™ or iOS devices wirelessly stream content to a projector. In addition, vRemote can instantly help users automatically correct keystone with a simple snapshot of the projected image. Administrators can also remotely view the projectors' lamp working hours and adjust keystone.


*Only available on certain models.



App- The world's pioneer ProjectorExpert APP Cover all completed projector applications at once!

ProjectorExpert APP contains all ViewSonic

projector product information, projection distance measurement, ViewSync wireless introduction, industrial application case study, news messages, etc.. It integrates all projector related information and can be as general users' perfect assistant when choosing or installing projectors, providing users' a platform with convenient and sufficient information as well as to become dealers, distributors, system integrators' portable tool which can check instantly.

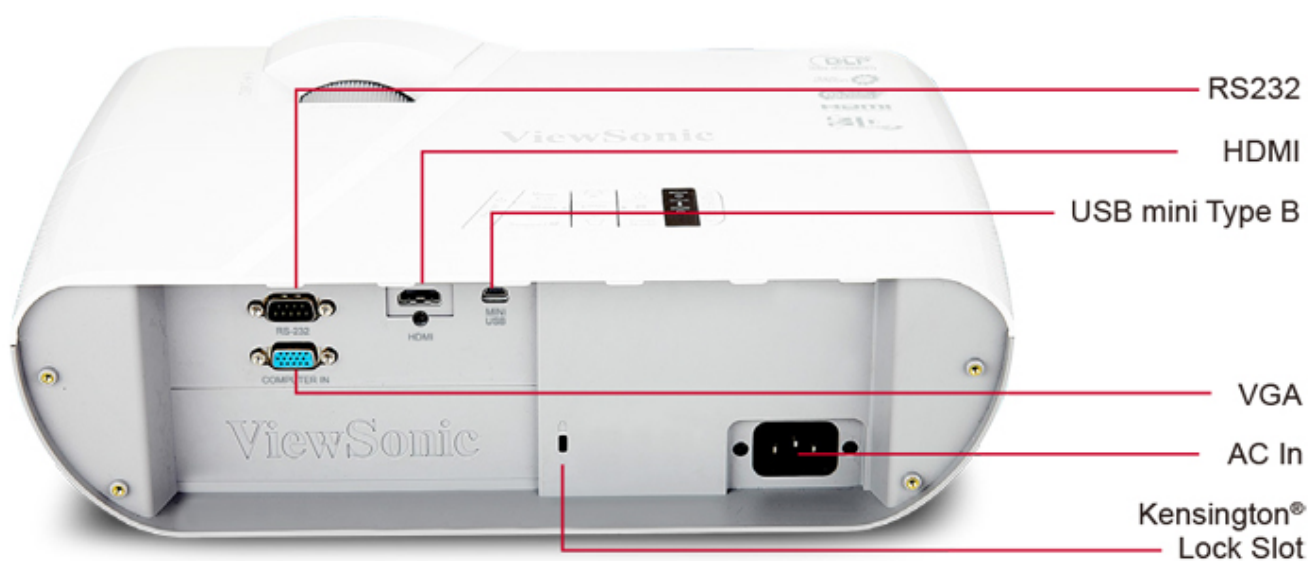

Model No.: 15918

Technical Specifications

Display	Resolution	1024x768 (XGA)
	Throw Distance	0.4m - 3.8m
	Throw Ratio	0.6
	Lamp	210 W
	Brightness	3200 ANSI Lumens
	Contrast Ratio	20,000:1 (w/DynamicEco Mode)
	Keystone Correction	Vertical: +40~-40°, (Manual)
	Aspect Ratio	4:3
	Color Depth	1.07 Billion Colors (30 bits per color)
	Optical Offset	130%±5%
	Size	30"-300"
	Lamp Hour	4,000/10,000 (Sleep Mode) Hours
Audio	Speakers	2Wx1 Cube
Input Signal	Video	SD: 480i and 576i ED: 480p and 576p HD: 720p,1080i,1080p
	Frequency	Fh: 15-100KHz; Fv: 24-120Hz
Compatibility	PC	1024x768@60Hz (native)
	Mac	1024x768@60Hz (native)
Connector	RGB Input	VGA x1
	Component Video	Share with VGA x1
	Digital	HDMI 1.4x1
	Control	RS232(DB-9)x1
	USB	Mini USBx1
Power	Voltage	100~240Vac 50/60Hz (Auto Switching)
	Consumption	275W (Max)
Operating Conditions	Temperature	32°~104°F / 0°~40°C
	Humidity	10~90%, Non-Condensation
Dimensions	Physical	362(width) x 116 (height) x 248(depth) mm
Weight	Net	2.5 kg
Regulations	CB, TUV, GS, UL, CCC, CE, FCC,C-Tick, Mexico Energy test/Registration, EAC, UkrSEPRO/EMC DOC, UL COC, TUV-S Mark(Argentina), CECP, ROHS, REACH, SVHC, WEEE, ErP	
Package Contents	1. Power Cord (1.8m) 2. VGA Cable(1.8m) 3. Remote Control with AAABatteries 4. Quick Start Guide (one sheet version) 5. ViewSonic CD Wizard (User Manual) 6. Lens Cover	

08142015