

EP5502

**VERSATILE VIDEO
55" DIGITAL SIGN BOARD**


Impactful High-Definition Digital Poster

ViewSonic's new ePoster products make it easy to replace those old backlit printed signs with new impactful video messaging on high definition digital posters. These sleek new displays feature versatile input connections for easy content uploading or adding your favorite media player. Information is disseminated through the ePoster's video connectors via or media player or USB thumb drive. ViewSonic's new ePoster products are available in various sizes and slim profiles fit in beautifully with their limited footprint. Great for announcing special promotions, computer-generated information or communicating multimedia with photos, audio, signage, and video.






- > **55" Full HD 1920x1080 display resolution**
- > **450 nits of brightness with 5,000:1 contrast ratio**
- > **Sleek tempered glass faceplate**
- > **Versatile video inputs**
(HDMI, VGA, YPbPr, USB, A/V)
- > **Easy loading of content through USB thumb drive**
- > **Internal VESA mounting and power supply for adding media players**
- > **Compatible with the ViewSonic NMP-570w network media player (Optional)**
Includes Signage Manager Express software
- > **5W (x2) internal audio for playing digital audio files**
- > **Applications:**
RETAIL ADVERTISING
TRANSPORTATION
HOSPITALITY
EDUCATION

EP5502 VERSATILE VIDEO DIGITAL SIGN BOARD

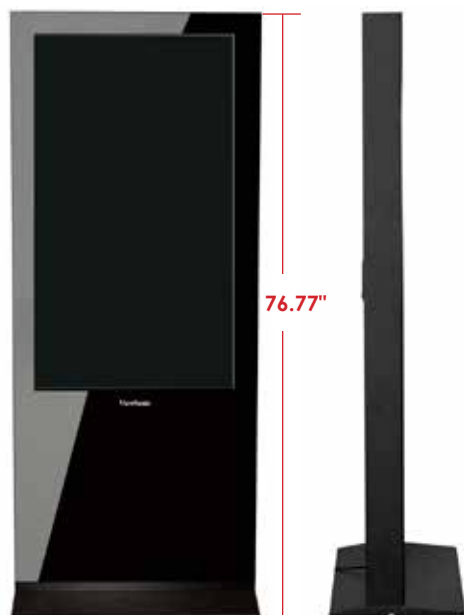

DISPLAY	Diagonal	55" (139.7 cm)
	Resolution	1920x1080 dots
	Color	Over 16.7M color (depending on video card used)
	Brightness	450 cd/m ² (typ)
	Contrast Ratio	5000:1 (typ)
	Response Time	6.0ms (typ gray-to-gray)
CONNECTIVITY	I/O Ports	HDMI, VGA, YPbPr, USB (x2), A/V, RJ45 Pigtail
	Storage	4GB
INTERNAL	Media Player Supports	Video: MPEG 1/2/3, H.264, Xvid 1.00-AVI, MP4 Photo: JPEG Audio: WMA, MP3, M4A (AA CC)
		Clock and timer
AUDIO	Speakers	5W (x2)
POWER	Supply	3.2-1.38 A @ 100-240VAC, 50/60Hz
	Consumption	450W (max)
	Save	Off < 1W
OPERATING CONDITIONS	Temperature	32-104° F (0-40° C)
	Humidity	20-90% (non-condensing)
STORAGE ENVIRONMENT	Temperature	-4-140° F (-20-60° C)
	Humidity	10-90% (non-condensing)
DIMENSIONS (WxHxD)	Physical	31.58" x 76.77" x 17.72" (820mm x 1950mm x 450mm)
WEIGHT	Net	242 lbs. (110 kg)
	Gross	286 lbs. (130 kg)
REGULATIONS		FCC, ICES 003, CE
MTBF		50,000 hrs.
PACKAGE CONTENTS		ePoster, power cord, remote control with batteries, key, Quick Start Guide, User Manual and Software on CD
WARRANTY		1-year limited warranty with extended options available

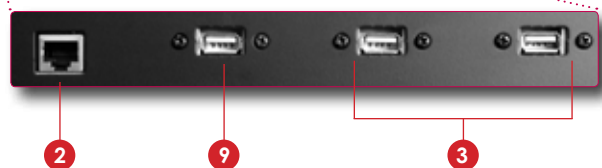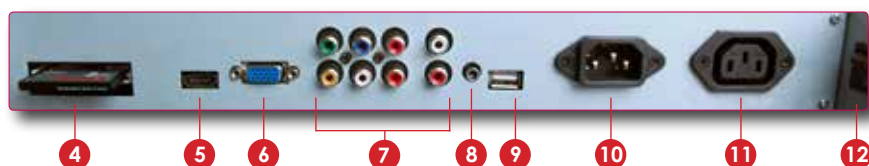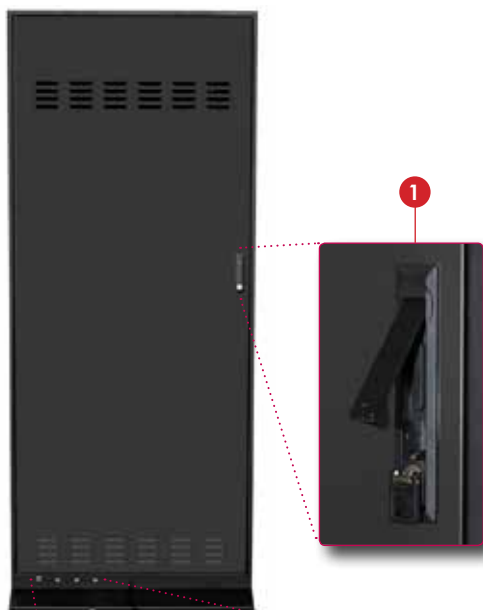

- 1 – Security Latch/Handle
- 2 – RJ45 Ethernet LAN port (extension to optional media player)
- 3 – USB 2.0 Port (x2)
- 4 – 4GB Memory Card
- 5 – HDMI Port
- 6 – VGA Input
- 7 – YPbPr & A/V
- 8 – PC Audio
- 9 – USB Port (content loading only)
- 10 – AC Power Male Port
- 11 – AC Power Female Port
- 12 – Power On/Off



Sales: (888) 881-8781 • SalesInfo@ViewSonic.com • ViewSonic.com

Specifications and availability are subject to change without notice. Selection, offers and programs may vary by country; see your ViewSonic representative for complete details. Corporate names, trademarks stated herein are the property of their respective companies. Copyright © 2013 ViewSonic Corporation. All rights reserved. [16689-008-04/13]

ViewSonic®
See the difference®



For more product information, visit us on the web at ViewSonic.com