

# 22" Full HD Display with Wide Viewing Angle



**VA2214S**



ViewSonic's price-performance VA2214S 22" (21.5" viewable) Full HD display with 1920x1080 native resolution delivers great color performance and energy efficiency. With SuperClear® technology and an advanced VA LED panel, the VA2214S offers extremely wide 178°/178° viewing angles for consistent color performance, and 3,000:1 native contrast ratio for sharp, crisp image quality. Windows 8 compatibility, VESA wall mount compliance and Energy Star certification are standard features, as well as an energy-saving Eco-mode. Plus, its glossy-finish design with integrated DVI and VGA inputs make the VA2214S a stylish and flexible display solution for home entertainment or office work.


## **SuperClear® technology presents Consistent Color Performance from any angle**

Get the best view, wherever you are. Industry-leading SuperClear® technology delivers 178-

## **1080p Full HD for high-definition application**

Full HD 1080p resolution delivers stunning image quality with superior detail and sharpness for home and business applications. Ideal for graphic design,

degrees of vertical and horizontal viewing angles. Experience accurate, vivid colors, and consistent brightness levels whether you're looking at the screen from above, below, the front, or the side—with no distortion or decay.

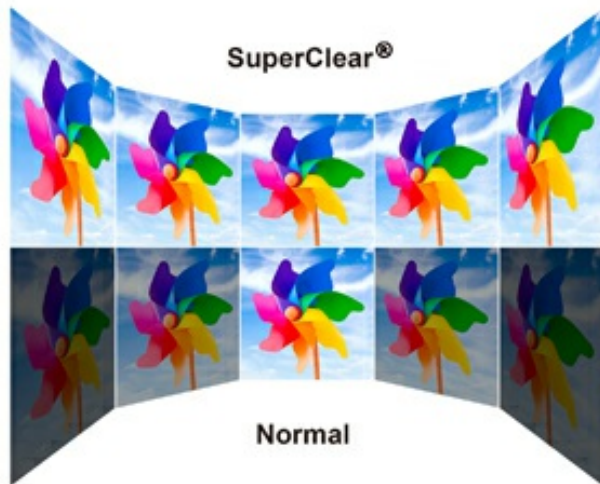


### Energy-saving Eco-mode reduces energy costs

ViewSonic's proprietary 'Eco' mode function provides "Optimize" (75%) and "Conserve" (50%) backlighting output options. This reduces the backlighting output, based on different working scenarios and saves up to 40% on power consumption. Consequently, this prolongs the display lifespan and lowers the total cost of ownership. Eco mode provides a more comfortable working environment, especially for those who work for extended periods of time.



video production, and advanced business applications requiring professional monitor performance.

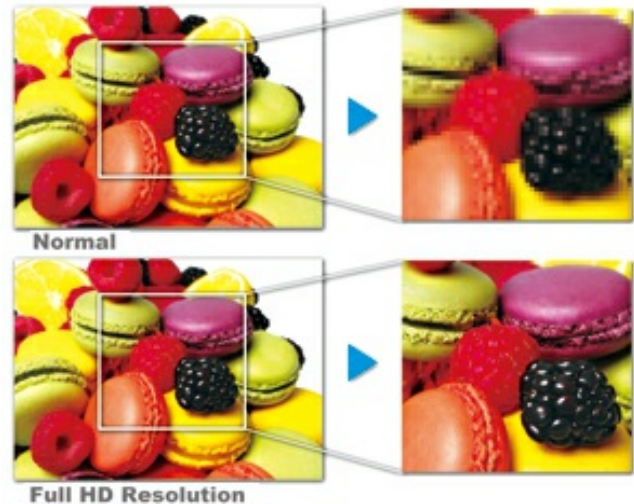

### Energy Star® qualified energy-efficient product

The VA2214S is environmentally sound, complete with an energy-saving LED backlight and Eco-mode. It's ENERGY STAR® certification means you save up to 40% in energy costs when compared to regular 22" monitors.

### Windows® 8 certified and VESA® wall mount compliant

Windows® 8 Certified, the VA2214S provides the most updated Windows® 8 experience without any compatibility issues. Experience the all-new Windows 8 operating system with ViewSonic's VA2214S display.

## Technical Specifications

|                             |                           |                                                                                                              |
|-----------------------------|---------------------------|--------------------------------------------------------------------------------------------------------------|
| <b>LCD</b>                  | <b>Type</b>               | 21.5" Wide Color a-Si TFT Active Matrix                                                                      |
|                             | <b>Display Area</b>       | 21.5 inch                                                                                                    |
|                             | <b>Optimum Resolution</b> | 1920x1080                                                                                                    |
|                             | <b>Contrast Ratio</b>     | 3000:1, 10,000,000:1 (DCR)                                                                                   |
|                             | <b>Brightness</b>         | 250 cd/m <sup>2</sup> (typ)                                                                                  |
|                             | <b>Viewing Angles</b>     | 178° horizontal, 178° vertical                                                                               |
|                             | <b>Response Time</b>      | 6ms?G to G?                                                                                                  |
|                             | <b>Panel Surface</b>      | Anti-glare Type, 3H Hardness                                                                                 |
|                             | <b>Light Source</b>       | 30,000hr (min.)                                                                                              |
|                             |                           |                                                                                                              |
| <b>Video Input</b>          | <b>Analog</b>             | RGB Analog (75 ohms, 0.7 / 1.0 Vp-p)                                                                         |
|                             | <b>Digital</b>            | DVI (TMDS, 100 ohms)                                                                                         |
|                             | <b>Frequency</b>          | Fh: 24-82KHz; Fv: 50-75Hz                                                                                    |
| <b>Compatibility</b>        | <b>PC</b>                 | VGA up to 1920x1080 Non Interlaced                                                                           |
|                             | <b>Mac</b>                | up to 1920 x 1080                                                                                            |
| <b>Connector</b>            | <b>Analog</b>             | DB-15 x1                                                                                                     |
|                             | <b>Digital</b>            | DVI-D x 1                                                                                                    |
|                             | <b>Power</b>              | Internal Pow er Board , 3-pin plug (CEE22) x1                                                                |
| <b>Power</b>                | <b>Voltage</b>            | AC 100-240V (Universal); 50/60 Hz                                                                            |
|                             | <b>Consumption</b>        | 23W (typ), Optimize: 19W, Conserve: 17W                                                                      |
| <b>Operating Conditions</b> | <b>Temperature</b>        | 32°F to 104°F (0°C to 40°C)                                                                                  |
|                             | <b>Humidity</b>           | 10% to 90% (No Condensation)                                                                                 |
| <b>Dimensions</b>           | <b>Physical</b>           | 511.1mm (w idth) x 391.8mm (height) x 189.9mm (depth)                                                        |
| <b>Weight</b>               | <b>Net</b>                | 2.8 kg                                                                                                       |
| <b>Regulations</b>          |                           | CE, CB, WEEE, RoHS, REACH SVHC List,Energy Star,Window 8, Window 7, BSMI, PSB, C-tick                        |
| <b>Wall Mount</b>           |                           | VESA® 100mm x 100mm                                                                                          |
| <b>Package Contents</b>     |                           | LCD Display Pow er Cable D-Sub Video Cable View Sonic Wizard CD-ROM Quick Start Guide Base Instruction Guide |

10032016