

Ultra Short Throw Networkable XGA Projector. Advanced Connectivity for Classrooms and Boardrooms.



PJD8333s



The ViewSonic® PJD8333s is an advanced networkable XGA DLP® ultra short throw projector that offers advanced connectivity for classrooms and meeting rooms. With an ultra short throw lens, the PJD8333s can project a 70" image from only 2.2 feet away. Equipped with Crestron® LAN controller, the PJD8333s makes it easy for IT admin to remotely control and manage multiple projectors from their workstations. Built with BrilliantColor™ technology, this projector produces vibrant colors, while 3000 ANSI lumens and 15000:1 contrast ratio deliver bright, razor-sharp images. Certified with AMX® Device Discovery™, the PJD8333s easily integrates into any size campus or enterprise. In addition, the PJD8333s is packed with advanced features including wired and wireless LAN display, LAN control, USB display, a mobile app for smart phones and tablets, capability for PC-less presentations, HDMI that is 3D Blu-ray ready, DynamicEco™, and integrated 16w speaker. The



Ultra Short Throw Networkable XGA Projector. Advanced Connectivity for Classrooms and Boardrooms.



PJD8333s


PJD8333s is the perfect projector for small spaces and corporate environments.

Bright Images for Classrooms & Meeting Rooms

Packed with 3,000 lumens and a high contrast ratio of 15,000:1 (w/ DynamicEco™), the PJD8333s is guaranteed to produce bright images in classrooms and corporate environments.

Project Large, Stunning Images in Small Places

With an ultra short throw lens, the PJD8333s can project a 70" image from only 2.2 feet away—making it perfect for small rooms with space limitations. In addition, blinding lights in front of the presenter, distracting shadows on the projected image, or glaring hotspots on the whiteboard, are all eliminated because the projector's light source is closer to the screen.

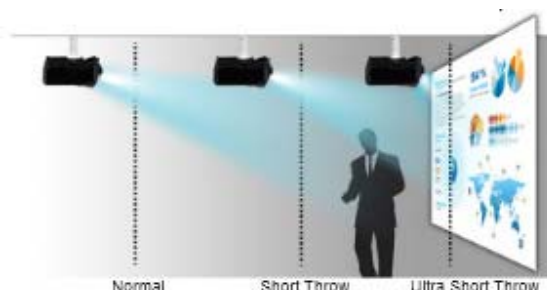

Wireless & Wired LAN Display

With its advanced networking capability, the projector can project images via wireless, or wired, LAN. The LAN display offers a quad split screen for simultaneously projecting content from up to 4 PCs, with the ability to broadcast from up to 8 projectors. The WPD-100 wireless adapter is required for wireless display.

Mobile App for Smart Phones & Tablets

With the optional WPD-100 wireless USB adapter, you can use ViewSonic's app on your Android™ or iOS devices as a remote control for the projector. In addition, you can send and project content such as MS Office documents, PDFs, videos, or images directly from your mobile device. The ViewSonic mobile app also offers live draw and live cam functions to create an interactive experience for your presentation.



Ultra Short Throw Networkable XGA Projector. Advanced Connectivity for Classrooms and Boardrooms.



PJD8333s

PC-less Presentation

Jump start your presentation without waiting for the PC to boot up. With a PC-less presentation feature, you can display MS Office documents, PDFs, videos or images directly from a USB flash drive.

Long Lamp Life up to 7000 Hours

New and advanced lamp technology extends the projector's lamp life up to 7000 hours*, resulting in huge savings on lamp replacement costs.

Network Monitoring & Control

IT admin can monitor, schedule, and manage the projector remotely, as well as receive projector status alerts, with the integrated Crestron® e-Control™ system and RoomView Express™ management software. Because the PJD8333s is Crestron® and AMX® certified, IT admin can control and monitor multiple projectors for any size campus or enterprise.



Plug n' Play USB Display

Project your presentations using a quick and simple plug-and-play USB connection without running a bulky VGA cable. Plug n' Play also features automatic resolution detection for the best imaging experience.



3D Blu-ray Ready HDMI

HDMI delivers the highest picture and sound quality without degradation. Equipped with the latest HDMI, ViewSonic's PJD8333s projector can display 3D images directly from 3D Blu-ray® players—perfect for connecting to any HDMI-enabled devices such as PCs, laptops, tablets, and media players.

Technical Specifications

Display	Type	0.55" Digital Micromirror Device (DLP™)
	Resolution	1024x768



Ultra Short Throw Networkable XGA Projector. Advanced Connectivity for Classrooms and Boardrooms.



PJD8333s

	Lens	Fixed zoom / Manual optical focus
	Size	60 - 250 inch
	Throw Distance	0.5m - 2.0m
	Lamp	240 watt / 7000 hours Eco Mode
	Brightness	3000 ANSI Lumens
	Contrast Ratio	15,000:1
	Keystone Correction	Vertical digital keystone correction (+/- 40°)
	Aspect Ratio	4:3 (native)
Audio	Speakers	16-watt (x1)
Input Signal	Analog	NTSC M (3.58 MHz), 4.43MHz, PAL (B, D, G, H, I, M, N, 60), SECAM (B, D, G, K, K1, L), SD 480i and 576i, ED 480p and 576p, HD 720p, 1080i, 1080p
	Frequency	Fh: 31-100KHz; Fv: 24-120Hz
Compatibility	PC	VGA to 1600x1200 UXGA
	Mac	Up to UXGA (may require MAC adaptor)
Connector	RGB Input	15-pin mini D-sub (x2)
	RGB Output	15-pin mini D-sub
	Composite Video	RCA jack
	S Video	4-pin mini-DIN
	Component Video	15-pin mini D-sub (x2, shared with RGB)
	Digital	HDMI
	Audio	Input: 3.5mm mini jack (x2)
		Output: 3.5mm mini jack
		Microphone Input 3.5mm mini jack (shared with Audio 2)
	Control	RS-232 (DB-9)
	USB	Type A (card reader and wireless dongle)
		Type B (mouse control and service)
		Mini Type B (USB display)
	Power	DC 12V Trigger (3.5mm plug 12V/1A)
	Network	RJ45
Power	Voltage	100~240VAC (Auto Switching), 50/60Hz (universal)
	Consumption	320W (max) / <0.5W (stand-by mode)
Operating Conditions	Temperature	32°F–104°F (0°C–40°C)



Ultra Short Throw Networkable XGA Projector. Advanced Connectivity for Classrooms and Boardrooms.



PJD8333s

	Humidity	10%–90% (non-condensing)
Dimensions	Physical	335mm (width) x 128.3mm (height) x 265mm (depth)
Weight	Net	3.6 kg
Regulations	CB, UL/cUL, FCC-B, NOM, KC, REACH, ErP, SVHC UL-Argentina, PSB, C-tick, SASO, CE, GOST-R, CCC, RoHS, WEEE, UkrSEPRO	
Package Contents	PJD8333s projector, power cable, VGA cable, remote control with batteries, carrying case, Quick Start Guide, ViewSonic Wizard DVD (with User Guide)	

