

Quad output zero client, Teradici Tera 2, PCoIP for VMware



SC-Z56



The ViewSonic SC-Z56 quad output zero client is the perfect solution for organizations seeking a secure, easy to manage, more reliable solution in networks based on VMware. Certified for VMware Horizon View, this highly secure zero client supports advanced 2D/3D applications and can simultaneously drive up to four Full HD displays. Based on the Tera 2140 chip platform, this new zero client provides the highest possible performance in a VMware View environment. The SC-Z56 is ideal for high-end workstations, securities traders, or any user requiring multiple displays and maximum workspace. ViewSonic's zero clients are the smart choice for optimizing your virtual desktops.

Key Features:

- Fastest Tera 2 Performance, with Teradici Tera 2140 processor (50MPS)
- 4 DisplayPort video outputs to drive quad 1920x1200 displays, or dual 2560x1600
- USB redirection with 6 x USB V2.0 ports for better peripheral connectivity
- Headphone Out and Microphone Input for full multimedia support
- Ultra Compact 1.0L Form Factor Design is easily VESA mountable



Quad output zero client, Teradici Tera 2, PCoIP for VMware



SC-Z56

High-performance Teradici Processor and 512MB System Memory



teradici.

The ViewSonic SC-Z56 is equipped with the most advanced Teradici Tera 2140 processor designed for VMware virtualization. This powerful processor delivers faster performance, supports 2D/3D graphic intensive applications for a rich multimedia experience at full frame rates over gigabit Ethernet, as well as drives up to two 2560x1600 displays or four 1920 x 1200 displays.



4 DisplayPort Outputs for Multi-screen Applications and Increased Productivity



The SC-Z56 has 4 integrated DisplayPort connections to support up to 4 Full HD displays or 2 QHD displays. This enhances working efficiency and productivity for today's high-end workstations, or for any user that requires multiple displays.



Flexibility for All your Peripherals with 6 USB Ports



6 USB ports provide versatile connectivity for work or entertainment-related peripherals. There are 2 USB ports in the front and 4 in the back for adding a keyboard, mouse, hard drive, and more. Also included are 10/100/1000Mbps Gigabit Ethernet, and microphone and headphone inputs that deliver fast LAN connectivity and teleconference capability.

Simplified and Secure Centralized Management

teradici PCoIP. The free Teradici PCoIP management console provides for simplified and secure centralized deployment and management. With web-based access, administrators will be able to configure, update, manage, and even remotely control the power state of all their PCoIP-based zero clients throughout the network.



Quad output zero client, Teradici Tera 2, PCoIP for VMware



SC-Z56



Low Total Cost of Ownership



All of the benefits of a virtual desktop deployment can be realized with ViewSonic's SC-Z56 Zero Client. Offering simple and quick deployment, enhanced security with no local HDD, increased reliability and higher productivity, the SC-Z56 is an efficient and low-cost choice for virtualizing desktops.



Save Cash and Save the Planet

With its ultra low 15W typical power consumption the ENERGY STAR certified ultra compact SC-Z56 Zero Client is not only environmentally friendly but also friendly on your electricity bill. The savings of this Zero Client PC with an LED display can add up to thousands of dollars for large install bases, compared to traditional PC's and monitors. The savings can be as dramatic as \$120,000 in five years.

Traditional PC System PC + LCD Monitor = 150W



Zero Client System Zero Client + LED Monitor = 30W



***Cost of electricity for 1,000 systems over the course of 5 years.** Based on 5-year life cycle, electricity rate of \$0.096/KWh and 10 hour day (8 active, 2 standby). Actual savings may vary based on models actual usage, energy rates and other factors. The savings reflected above is for illustrative purposes and are not model-specific.

VESA-compliant Design

Versatile connectA VESA-compliant mount accommodates flexible placement in any work environment. The SC-Z56 is equipped with a 100 x 100mm VESA mount plate that allows for desktop

Key Applications

- Enterprise Class Zero Client Computing Performance (VMware)
- Financial, Healthcare, Government, and Education customers



Quad output zero client, Teradici Tera 2, PCoIP for VMware



SC-Z56


stand mounting, wall mounting, and more depending on the specific needs of your installation.

- No local file saving for Hipaa and Sarbanes Oxley compliance



Dimensions and Other Features:

Product Dimensions (W x H x D) with stand: 1.46" x 8.11" x 5.42"

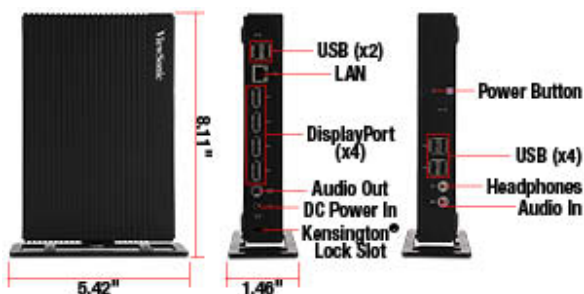

What is in the box:

- SC-Z56 Zero Client
- Power cord
- Power adapter
- Stand / VESA mounting bracket
- Quick Start Guide
- ViewSonic Wizard CD (with User Guide)

Technical Specifications

CORE	CPU Processor Type	TTeradici Tera2140; 50 MPPS
GRAPHICS	Graphic Chipset Resolution	DisplayPort x 4 1920x1200 (Quad Display), 2560x1600 (Dual Display)
MEMORY	System	512MB (DDR3)



Quad output zero client, Teradici Tera 2, PCoIP for VMware



SC-Z56

COMMUNICATION	Ethernet LAN	10/100/1000 Giga bit Ethernet (RJ45)
CONNECTOR	USB	6 (V2.0)
	Microphone In	MIC
	Headphone	Headphone In
DIMENSIONS (WxHxD)	Physical with Stand	1.5" x 8.1" x 5.4"
	Packaging	10.9" x 8.2" x 5.7"
WEIGHT	Net	1.2 lb
WALL MOUNT	VESA	100mm x 100mm

