

ViewBoard® 98" 4K Interactive Display

IFP9850-3




- UFT (Ultra Fine Touch) Technology
- myViewBoard™ digital whiteboard software
- ViewBoard® Cast 4-way split screen content sharing software
- SmartPort™ shared front USB ports for internal & external PCs
- 2.0 Stereo sound

The ViewBoard® IFP50 series embraces UFT (Ultra Fine Touch) Technology to offer more precise writing and faster processing time than traditional IR panels. Smooth, dual-pen writing with our new, slim 2.5mm pens enables groups of teachers and students to work efficiently on any detailed tasks that require the use of accurate, fine tipped pens. The ViewBoard® IFP50 series is designed with a slim bezel to broaden your viewing experience so that even at the edge you can write clearly and confidently. Integrated myViewBoard™ digital whiteboarding software allows users to collaborate on the go, while ViewBoard® Cast provides 4-way, split screen content sharing.

UFT Technology

UFT Technology enables precision writing with a 2.5mm diameter pen tip.

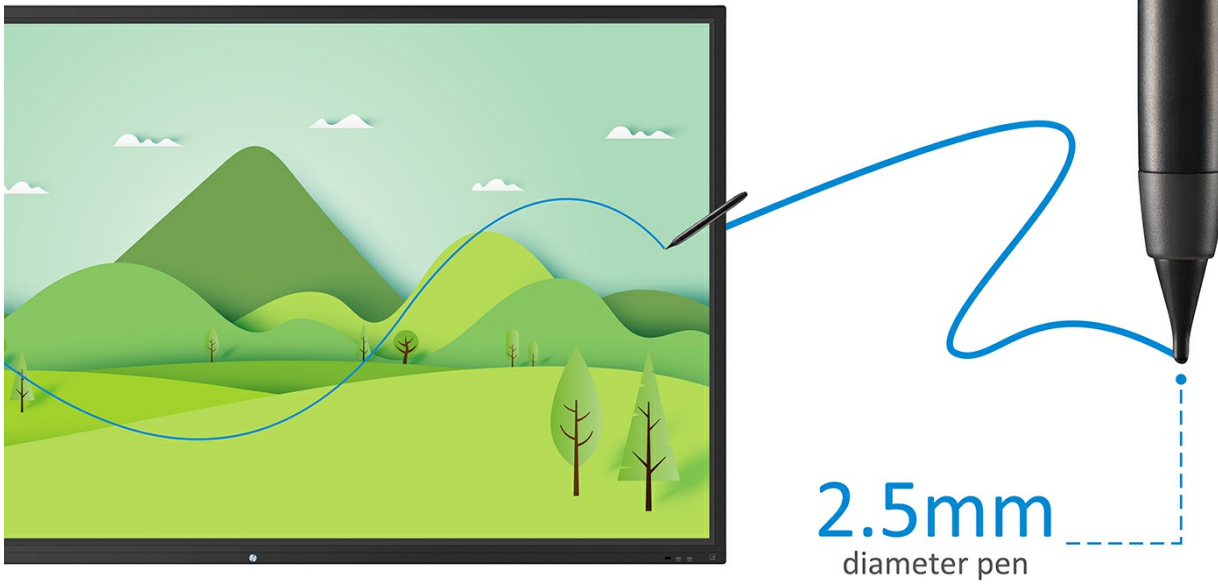


Dual-Pen

Automatically detect pen diameter (8mm & 2.5mm) and write simultaneously with different colours and thicknesses.




Full Native Performance on embedded OS

Built-in myViewBoard™ digital whiteboarding software to collaborate on the go.

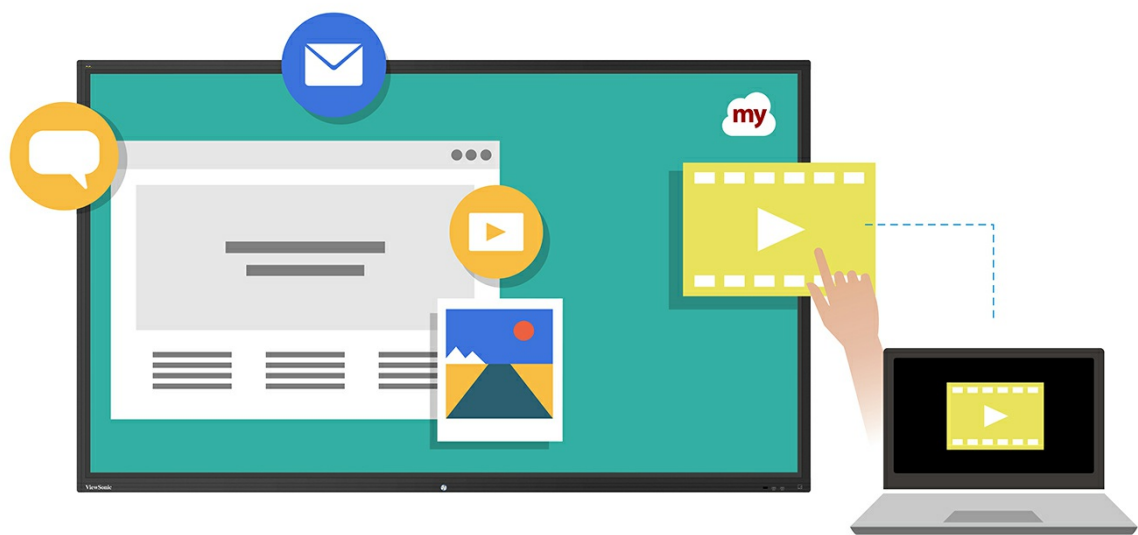


4-way Split Screen

4-way split screen content sharing with built-in ViewBoard® Cast software.

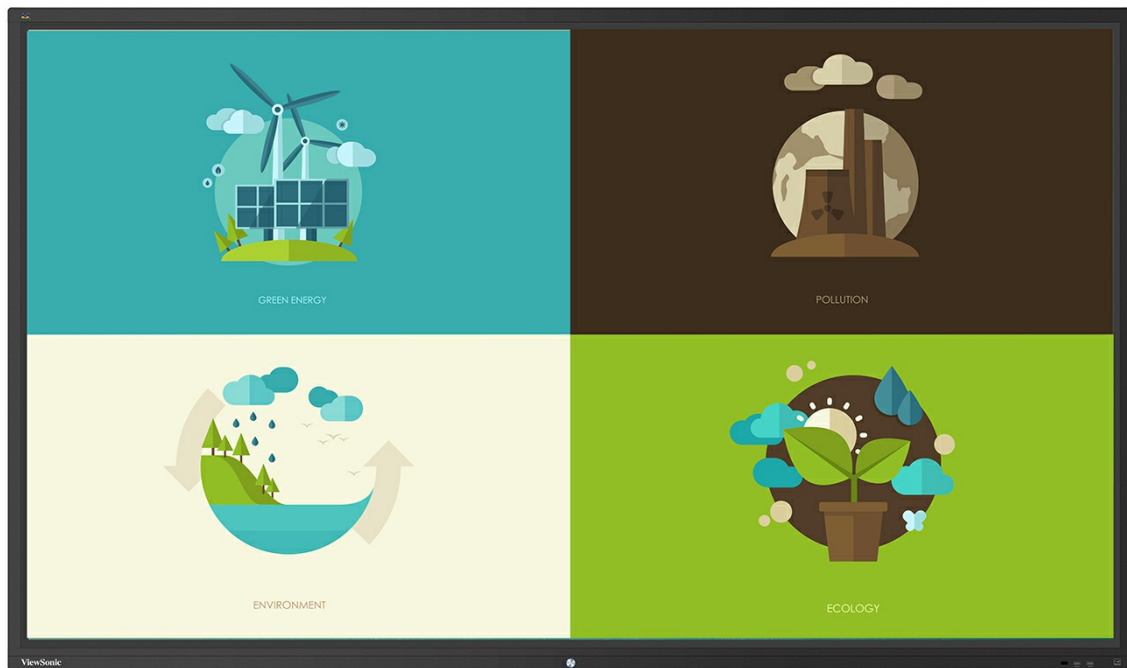


Shared USB Ports

SmartPort™ shared front USB ports for internal & external PCs.

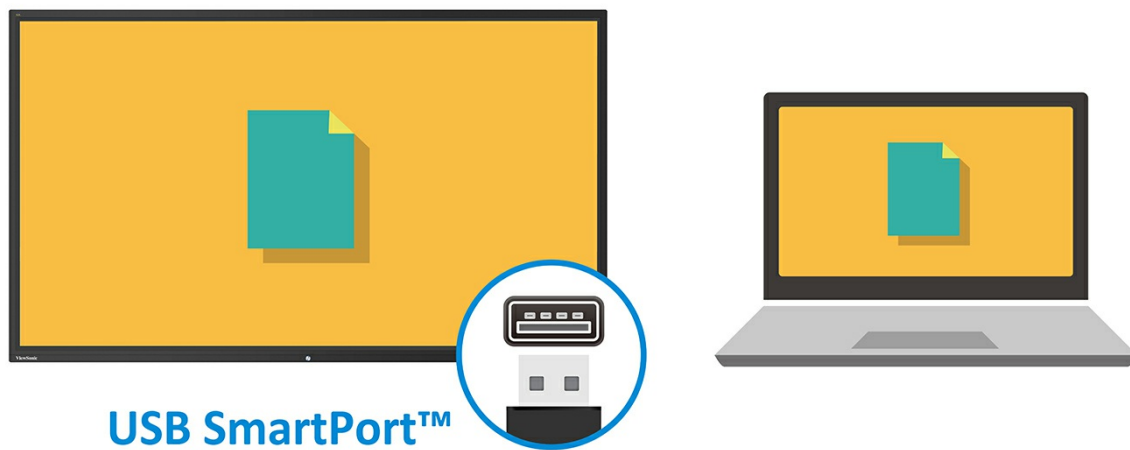

Stereo Sound

2.0 Stereo sound

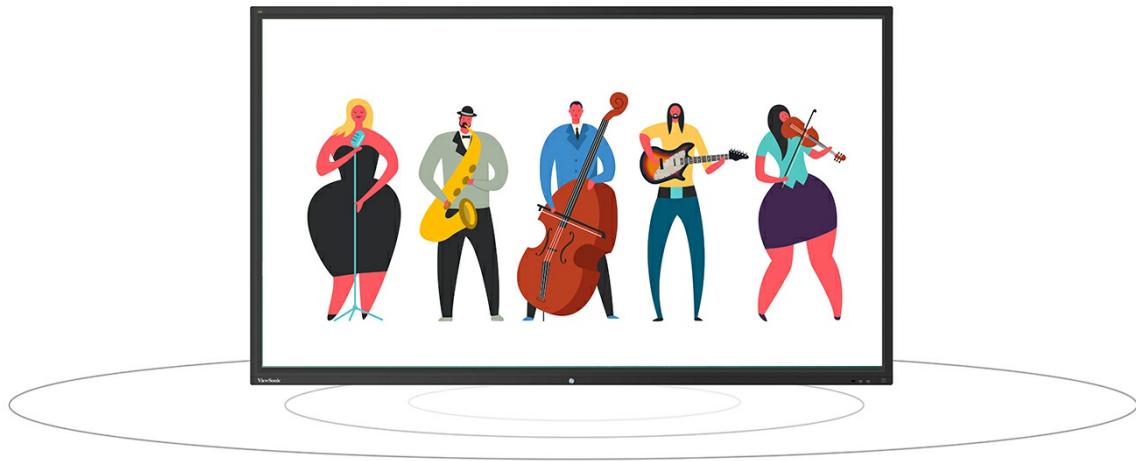

Faster Internet

GigaLAN provides a faster, more powerful internet connection.

GigaLAN




Remote Control

Built-in RS232 port and vController software for remote control.



Slot-in PC

Slot-in PC with Intel 8th-gen CPU (Optional).

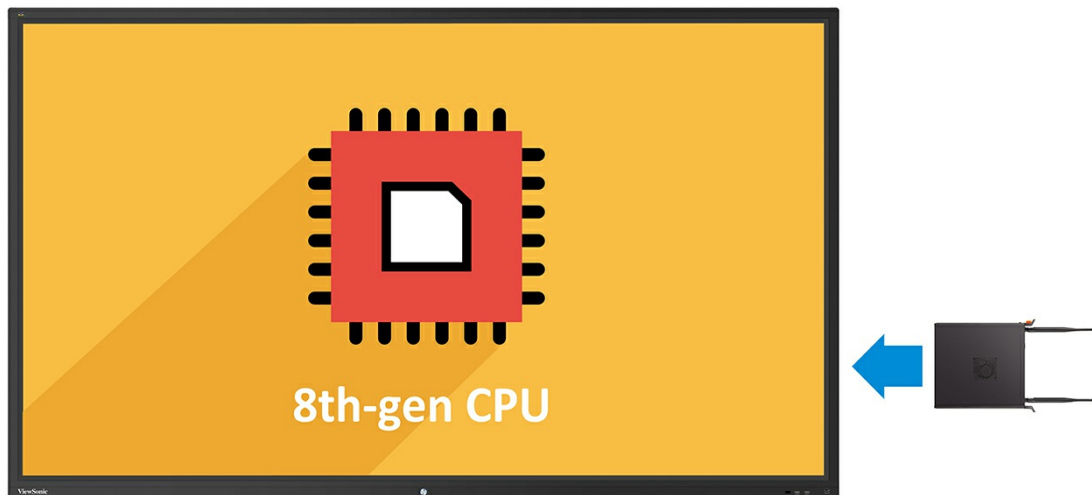


Web Camera

Top-mounted 1080p web camera (Optional).



I/O Ports

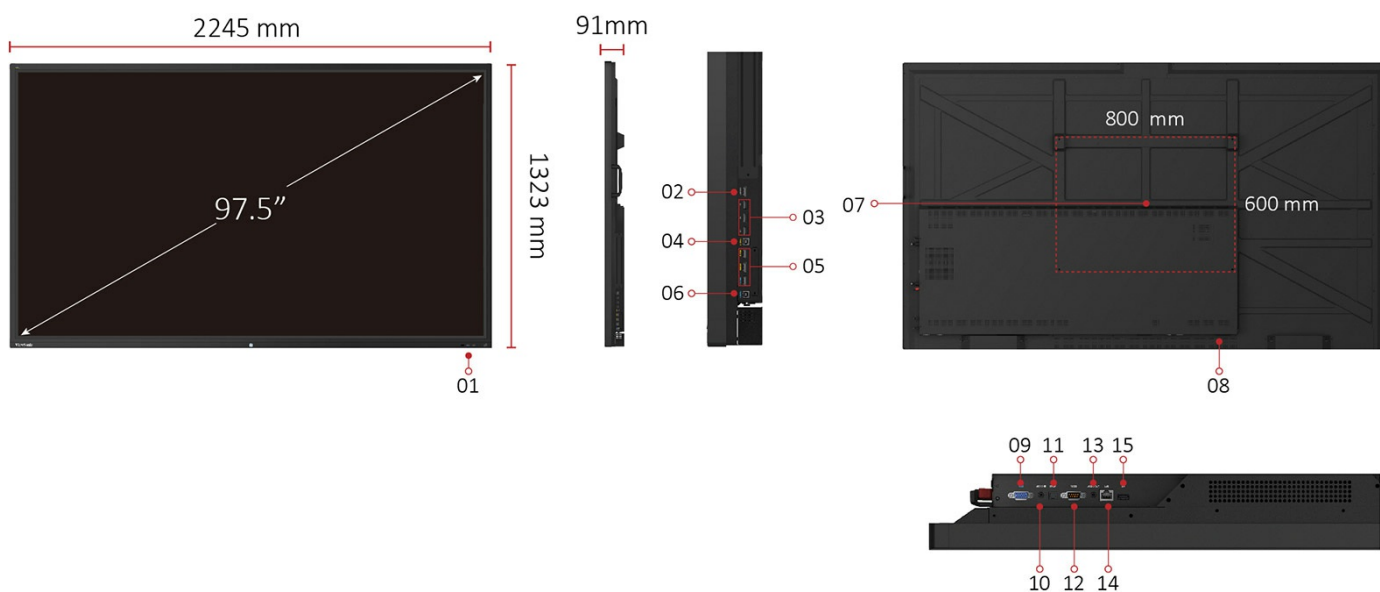

1. USB 2.0 X 2
2. HDMI OUT
3. USB 3.0 X 3
4. USB Touch Port
5. HDMI In X 3
6. USB Touch Port
7. VESA® WALL Mount 800x600 mm
8. AC IN
9. VGA
10. AUDIO IN
11. SPDIF Out
12. RS232
13. AUDIO OUT

- 14. LAN
- 15. USB 2.0

Technical Specifications

Display	Panel Size	98"
	Type/Tech	TFT LCD Module with DLED Backlight.
	Display Area (mm)	2171.85(H) x 1232.35(V) (97.52"diagonal)
	Aspect Ratio	16:9
	Native Resolution	UHD 3840x2160(Pixels)
	Colours	1.07B colours (10bit)
	Brightness	450 nits (typ.)
	Contrast Ratio	10000:1 (DCR)
	Response Time	6ms
	Viewing Angles	H = 178, V = 178 typ.
	Backlight Life	30,000 Hours (Min)
	Surface Treatment	Anti-Glare
	Orientation	Landscape
	Shell Materials	Metal Sell+ Alum Alloy Frame + Toughened Glass
	Surface	Metal Case with Powder Burning; Tempered Glass
Platform	Processor	ARM Cortex A73*2(1.5GHz)+A53*2(1.2GHz)
	RAM	3GB DDR4
	Storage	16GB
Touch	Type/ Tech	IR Recognition
	Touch Resolution	32767 x 32767
	Touch Point	20 points touch, 10 points writing
	Transparency Ratio	Min>97%
INPUT	HDMI	2.0 x3 (3840x2160 @60Hz)
	RGB / VGA	x1
	Audio	x1 (PC audio in)
	RS232	x1
	OPS	x1 PC Slot
OUTPUT	HDMI	x1
	Audio	x1 (Earphone out)
	SPDIF	1(optical)
	RS232	x1
LAN	RJ45	x1
USB	Type A	USB 2.0 x3 USB 3.0 x3
	Type B	x2, for touch
SPEAKERS	SPEAKERS	12Wx2
Camera plate on top for screw-in webcam installation	Camera plate on top for screw-in webcam installation	Yes
COMPATIBILITY	HDMI	3840x2160
USB SUPPORTED FILE FORMAT	USB SUPPORTED FILE FORMAT	Picture - BMP, JPEG, PNG,GIF

Video -
 Codec: H.263, H.264, MJPEG, MPEG2, MPEG4, RV30/40, VP6, Xvid-ASP
 Container: 3GP, ASF, ASX, AVI, FLV, M4V, MKV, MOV, MP4, MPG, MPEG, RMVB, TS
 H.265

Audio -
 Codec: AAC, ALAC, FLAC, MPEG 3, Vorbis, WAV, WMA
 Container: AAC, APC, FLAC, M4A, MP3, OGG, WAV, WMA

Bundle Software	Basic Annotation Software	myViewBoard for android
	Pro Annotation Software	myViewBoard for windows (Embedded in Windows Slot-in PC)
	Wireless Presentation with Touch Feedback: Viewboard Cast	ViewBoard Cast
Special Features	All-in-one USB port (combine Windows/Android USB port; no need to distinguish them anymore)	Front "SmartPort USB" to all channels.
	Simple LAN sharing between IFP and slot-in device	Yes
Power	Voltage	100-240VAC +/- 10% Wide Range
	Consumption	171 (Typ.) < 0.5 W ("Off")
ERGONOMICS	Wall Mount (VESA®)	800 x 600
OPERATING CONDITIONS	Temperature (° C)	0°C to 40°C
	Humidity	10% ~ 90% RH non-condensing
DIMENSIONS (W x H x D)	Physical (inch / mm)	88.4 x 52.1 x 3.6 in / 2245 x 1323 x 91 mm
	Packaging (inch / mm)	97.8 x 58.8 x 14.8 in / 2483 x 1493 x 376 mm
WEIGHT	Net (lb / kg)	223.77 lb / 101.5 kg
	Gross (lb / kg)	306 lb / 138.8 kg
REGULATIONS	REGULATIONS	FCC, cTUVus
Energy Star version	Energy Star version	ES8.0
EEI rating	EEI rating	A++
PACKAGE CONTENTS	PACKAGE CONTENTS	1. Power cable(3 meters) x 4 2. Remote control 3. USB cable(3 meters) 4. Touching pen x 2 5. Quick Start Guide 6. RS232 adapter 7. Clamp x 5 8. Plate 9. Screw x 8 10. HDMI cable
Compatible Slot-in PC	Compatible Slot-in PC	VPC14-WP series VPC10-WP series VPC15-WP series VPC16-WP series VPC17-WP series

12012020