



- ViewBoard® Cast 4-way split screen content sharing software
- USB Plug and Play
- Remote Management with vController™ Software
- Supports HDMI CEC Pass Through
- Embedded LAN, Optional Wi-Fi, Internet Browser

The ViewSonic® CDE9800 is a 98" 4K Ultra HD commercial display for meeting rooms. This display provides immersive and high-impact presentation with stunning 3840x2160 resolution, 500-nit typical high brightness, wide viewing angles, dual 16W speakers, and content sharing software. The built-in ViewBoard® Cast software enables wireless content streaming from mobile devices onto the display. In addition to HDMI and VGA inputs to connect with various high definition devices, this display utilizes an integrated multi-core processor, allowing customers to playback multimedia content via USB without the need for a PC. To make life even easier, the vController™ software offers easy maintenance and intuitive interfaces for remote management via a PC server or laptop.

4K Ultra HD Resolution

With four-times the resolution of Full HD, this Ultra HD 3840x2160 display delivers a breathtaking viewing experience with immersive images that are vibrant, clear, and as large as life.

4K Resolution



Full HD



Ultra 4K HD

Wireless Presentation Display across Devices

With support for Windows, Mac, Chrome, Android, and iOS, ViewBoard® Cast enables content to be presented from mobile devices onto the display wirelessly. Multiple users can simultaneously annotate content on their devices in real time with 4-split-screen display.

On-site content sharing software ViewBoard® Cast



USB Plug and Play

A powerful multi-core media player enables photo, music and video playback in seconds using just a USB connection.

USB playback Photos, music & video



Remote Management

vController™ software provides a simple and intuitive interface for remote management, OSD-related settings, and scheduling on deployed displays through RS232 or LAN.

Display Configuration Software vController™



HDMI CEC Pass Through



With HDMI CEC functionality, remote controller signals can be transmitted via HDMI cable to connected HDMI devices. This enables out-of-sight DVD players, sound systems, and other devices to be directly controlled with the display's remote controller for a wider range of viewing possibilities.

HDMI CEC local control



Embedded LAN, Optional Wi-Fi, Internet Browser

An integrated RJ45 connection, as well as optional Wi-Fi capabilities, provide easy network connection options for content streaming. An integrated internet browser provides simple content delivery via connection to the web.

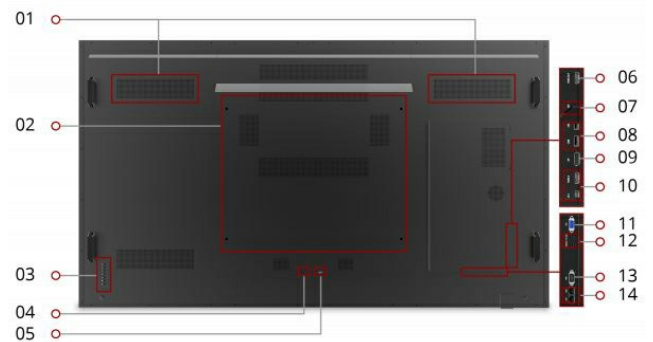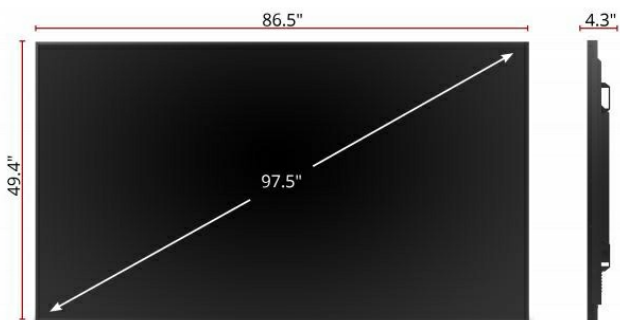

1. Internal Speakers
2. VESA® Compatible Wall Mount 800 x 600 mm
3. Menu Controls
4. Power Switch
5. AC In

- 6. HDMI Out
- 7. SPDIF
- 8. USB Type A x2
- 9. DisplayPort
- 10. HDMI x2
- 11. VGA
- 12. Audio In
- 13. RS232 In
- 14. LAN x2

Technical Specifications

Display	Panel Size	98"
	Type/ Tech	TFT LCD Module with LED Backlight
	Display Area (mm)	2158.848mm*1214.352mm
	Native Resolution	3840 x 2160
	Aspect Ratio	16:9
	Colours	1.07B (10bit)
	Brightness	500 nits(typ.)
	Contrast Ratio	1300:1
	Response Time	5 ms(typ.)
	Viewing Angles	H = 178, V = 178 (typ.)
	Backlight Life	30,000 hrs(min.)
	Surface Treatment	3H, Haze 1% (typ)
	Bezel	20.3mm
	Orientation	Landscape
INPUT	HDMI	x2 1 port to support CEC
	RGB / VGA	1
	DisplayPort	DP1.2 x1
	Audio	PC audio in (3.5 mm) x1
	RS-232	x1
	OPS	OPS x1 SDM-L x1
OUTPUT	HDMI	HDMI2.0 x1
	Audio	3.5mm Earphone Out x1
	SPDIF	x1
LAN	RJ45	X2 10M/100
USB	Type A	USB2.0 x2
SPEAKERS	SPEAKERS	16W x2
COMPATIBILITY	HDMI	HDMI in: 4k@60Hz HDMI out: 1080/4k @60Hz
	DisplayPort	3840x2160@60Hz
	Android Version	Resolution: 1080p
POWER	Voltage	100-240VAC +/- 10% Wide Range
	Consumption	On: 385W(Typ.) Off: <0.5W

ERGONOMICS	Wall Mount (VESA®)	800x600mm
OPERATING CONDITIONS	Temperature (° C)	0°C to 40°C
	Humidity	20% ~ 80% RH non-condensing
DIMENSIONS (W x H x D)	Physical (mm)	2198.8*109.5*1253.8mm
	Packaging (mm)	2525*435*1750mm
WEIGHT	Net (kg)	98.15 kg
	Gross (kg)	153.65 kg
REGULATIONS	REGULATIONS	cTUVus- FCC/ICES003 Class B- EPEAT ES8 Mexico CoC Mexico Energy EMC/CE-EU CB-EU RoHS Green BOM & RoSH DoC REACH WEEE (Doc & Disassembly report) ErP EAC(local apply) UKrSEPRO(local apply)
PACKAGE CONTENTS	PACKAGE CONTENTS	1. US/EU/UK/AU power cord 3M 2. QSG 3. Compliance statement 4. HDMI cable 3M*1 5. Remote control with AAA batteries 6. Webcam plate 7. Wall mount screws