

19" (18.5" Viewable) Widescreen LED

LED Backlight Monitor in a Small Format

VA1911a-LED



The ViewSonic® VA1911a-LED is an environmentally-friendly 19" (18.5" viewable) widescreen monitor that features LED backlight, providing energy savings up to 40%*. With 1366x768 resolution, 10,000,000:1 MEGA Dynamic Contrast Ratio and VESA mountable glossy finish design the VA1911a-LED is ideal for both home and office. It also has an automatic aspect ratio adjustment so when your input is a 4:3 signal, the image will not be stretched but instead it will be positioned in the middle of the screen with side bars. Industry's best pixel performance policy and energy-saving Eco-mode make the VA1911a-LED the best choice for both corporate and education customers as well.

sRGB Color Correction Defines the Truest Color

With built-in sRGB color correction technology, the VA1911a-LED can reproduce 100% sRGB rich color performance and capture the original and true colors from screen to print.



19" (18.5" viewable) Widescreen

The VA1911a-LED display a 18.5" viewable area with crisp detail and fully saturated color.

10,000,000:1 MEGA Dynamic Contrast Ratio

Dynamic contrast ratio defines a differentiating relationship between darkest and brightest colors when reproducing an image. With dynamic contrast ratio, VA1911a-LED is capable of automatically detecting the brightness and darkness of an image and adjusts the LED backlight accordingly. It maximizes grayscale and color ranges and boosts contrast ratio to an ultrahigh 10,000,000:1, resulting in rich, vibrant visuals.



Normal



Dynamic Contrast Ratio

19" (18.5" Viewable) Widescreen LED

VA1911a-LED



Planet-Friendly LED Backlighting

Environmentally-friendly with ENERGY STAR® and EPEAT-Silver certifications.



Up to 40%* Energy Savings with LED

Advanced LED panel technology uses up to 40%* less energy than traditional CCFL monitors. Embedded mercury-free LED backlighting and Eco-mode featuring energy-saving mode make this VA1911a-LED monitor an eco-friendly choice.

Stylish Slim-Bezel Design


The slim bezel lets you see more without taking up valuable desktop real estate.

The VA1911a-LED is Perfect for:

- Small Office / Home Office
- Corporations
- Government / Education
- Web Surfing



Menu Controls

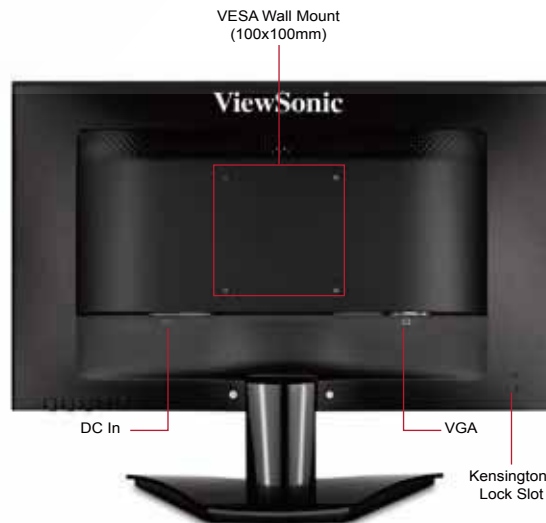

DC In

VGA

Kensington® Lock Slot



Slim Bezel

Tilt
Forward 5° / Back 21.5°

Specifications

LCD Panel	Type	19" (18.5" viewable) Wide Color TFT Active Matrix LCD
	Display Area	18.5" diagonal
Optimum Resolution	Brightness	1366x768
	Contrast Ratio	200 cd/m ² (typ.)
Dynamic Contrast Ratio	700:1 (typ.)	10,000,000:1
	Viewing Angles	90° horizontal, 65° vertical
Response Time	Backlight	5ms (typ)
	Backlight Life	White-light LED
Panel Surface	Panel Surface	30,000 hours (min.)
		Anti-glare, hard-coating (3H)
VIDEO INPUT	Analog	RGB analog (0.7 / 1.0 Vp-p, 75 ohms)
	Frequency	Fh: 24~82kHz, Fv: 50~75Hz
COMPATIBILITY	Sync	Separate Sync
	PC	PC compatibles (VGA up to 1366x768 non-interlaced)
CONNECTOR	Mac®	Up to 1366x768
	Video Analog	15-pin mini D-sub (VGA)
POWER	Power	Internal Power Board, 3-pin plub (CEE22)
	Voltage	AC 100~240V (universal), 50 / 60Hz
Consumption	Optimize	15W (typ.) / 17W (max.)
	Conserve	9.9W (typ.)

ERGONOMICS	Tilt	Forward 5°, Back 21.5°
OPERATING CONDITIONS	Temperature	32~104° F (0~40° C)
	Humidity	10~90% (non-condensing)
DIMENSIONS (W x H x D)	Physical with Stand	17.5 x 14.1 x 7.1 in. / 444.3 x 358.7 x 180 mm
	Physical without Stand	17.5 x 10.8 x 2.1 in. / 444.3 x 276.5 x 53.6 mm
	Packaging	19.5 x 15.9 x 5.0 in. / 495 x 405 x 128 mm
WEIGHT	Net with Stand	6.3 lb. / 2.8 kg
	Net without Stand	5.9 lb. / 2.7 kg
	Gross	7.8 lb. / 3.6 kg
WALL MOUNT		VESA 100x100 mm
REGULATIONS		CE, CB, WEEE, RoHS, REACH SVHC List, TCO, Energy Star, Vista premium, Window7, UL, cUL, FCC-B / ICES-003B, Nemko ERGO, GOSTR+ Hygienic, UkrSEPRO, ErP, CCC, CEL Level 1, BSMI, PSB, C-tick
POWER MANAGEMENT		ENERGY STAR® standards

What's in the box?

VA1911a-LED display, power cable, video cable, Quick Start Guide



ViewSonic Corporation's QMS & EMS have been registered to ISO 9001 & ISO 14001, respectively, by TUV NORD.