




The ViewSonic VA2261-2 is a 22" (21.5" viewable) Full HD LED Monitor which is ideal for business or home usage. It features 1080p resolution which delivers stunning image quality and more detailed content. ViewSonic's exclusive ViewMode feature provides intuitive presets that deliver optimized screen performance in different applications. Besides, Flicker-Free technology and a Blue Light Filter help to eliminate eye strain from extended viewing periods for improved productivity. VGA and DVI provides flexible connectivity, and a VESA-compatible mount adapt easily to multi-monitor or wall-mount set ups.

Full HD 1080p Resolution

This monitor features Full HD 1920x1080 resolution for unbelievable pixel-by-pixel image performance. You'll experience the most amazing clarity and detail whether it be while working, gaming, or enjoying the latest in multimedia entertainment.

ViewMode: Superior Color Rendering & Intuitive Settings

ViewSonic's unique ViewMode feature offers "Game," "Movie," "Web," "Text," and "Mono" presets. These presets enhance gamma curve, color temperature, contrast, and brightness to

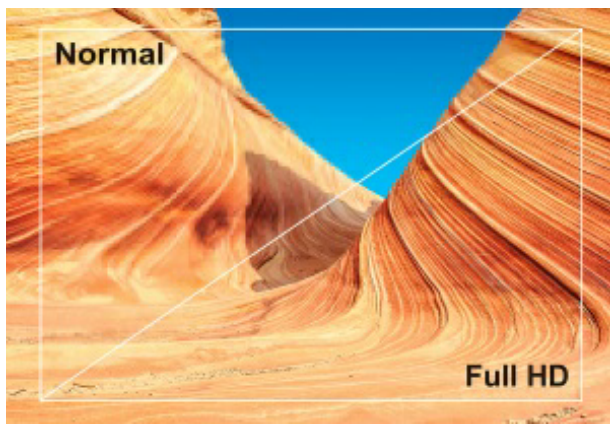


deliver an optimized viewing experience for different screen applications.



Flexible connectivity

DVI, and VGA inputs give you the freedom to connect your monitor to a variety of devices.

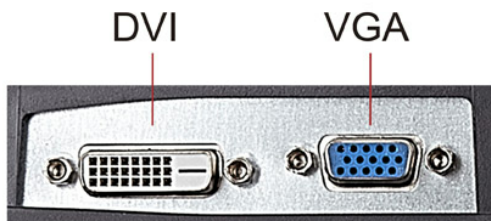

Enhanced Viewing Comfort

Flicker-Free technology and a Blue Light Filter help to eliminate eye strain from extended viewing periods.



Eco-mode Conserves More Energy and Cuts Costs

ViewSonic's proprietary Eco-mode energy-saving feature is built into all ViewSonic LED monitors. Eco-mode adjusts brightness and improves visibility, while reducing eye fatigue and prolonging the monitor's lamp life. With Eco-mode, the lifespan of the LED backlighting is also greatly increased.

VESA-Compatible Mount Design

Mount the monitor as you see fit using its convenient 75 x 75mm VESA-mountable design.



Technical Specifications

LCD PANEL	Type	22" (21.5" Viewable) TN Type, a-si TFT Active Matrix LCD
	Display Area	476.64 (H) x 268.11(V) mm
	Resolution	1920x1080
	Brightness	200 cd/m ² (Typ)
	Contrast Ratio	600:1 (Typ)
	Viewing Angles	90° (H) / 65° (V) (Typ)
	Response Time	5ms
	Backlight	1 WLED light bar
	Backlight Life	20,000 Hrs (Min)
	Colours	16.7M colors (6-bit+Hi-FRC)
	Colour Gamut	72% of NTSC (Typ)
	Panel Surface	Anti-Glare type, Hard-coating (3H), Haze 25%
INPUT SIGNAL	Frequency	24 ~82KHz / 50 ~ 75Hz
	Sync	Separate Sync
COMPATIBILITY	PC	1920 x 1080
	Mac	1920 x 1080
CONNECTOR	Digital	DVI-D x 1
	Analog	VGA x 1
POWER	Power	Internal Power Board
	Voltage	AC 100-240V (Universal); 50/60Hz
	Consumption	21.5W; Optimize: 14.5W (Typ.); Conserve: 12.5W (Typ.)
ERGONOMICS	Tilt	21° ~ -6°
WALL MOUNT	VESA®	75x75 mm
OPERATING CONDITIONS	Temperature	32°F to 104°F (0°C to 40°C)

	Humidity	20% to 90% (no condensation)
DIMENSIONS (W x H x D) (mm)	Physical with stand	504.00 (W) x 380.80 (H) x 179.60 (D)
WEIGHT	Net with stand	2.64kg (5.82lbs)
REGULATIONS		WEEE, RoHS, REACH SVHC List, CCC, CEL Level 1
PACKAGE CONTENTS		LCD Display / Power Cable / Video Cable / Quick Start Guide

02182016