

49 inch Full HD 3.5mm Ultra-Narrow Bezel 24/7 Tiling Support with DisplayPort or DVI video wall Commercial Display



CDX4952




With stunning brightness, vibrant images, and multi-screen tiling, the ViewSonic® CDX4952 49" (48.5" viewable) commercial display is your ideal tool for creating video walls that wow! With up to 10x10 tiling installation, and an ultra-narrow bezel that measures only 3.5mm between combined displays, the CDX4952 delivers nearly seamless, high-impact messaging that helps you to astonish, inspire, and inform. Featuring full metal construction and a scratch-resistant tempered glass screen, this durable commercial-grade display delivers reliable messaging 24 hours a day, 7 days a week. With Full HD 1080p resolution, 450-nit brightness, SuperClear® technology for wide viewing angles, and dual 10W stereo speakers, the CDX4952 delivers sharp, vivid images with incredible sound for superior multimedia performance.

Ultra-narrow Bezel

With a thin edge-to-edge bezel between combined displays, this commercial display creates stunning, near-seamless images when used in large video wall configurations.

10x10 Tiling Support with DisplayPort or DVI

With integrated DisplayPort and DVI outputs, this display supports up to 10x10 tiling for stunning multi-display video wall installations. As only one of the displays needs to be connected to an image/content source, installation and maintenance costs are reduced.

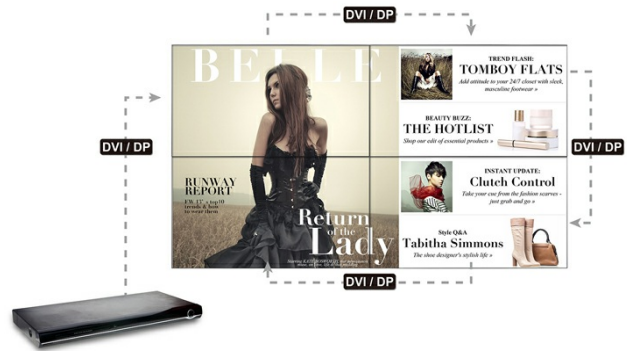

Control Multiple Devices

HDMI CEC functionality offers local control of DVD players, sound systems, and other HDMI connected devices, directly with the display's remote controller.



Free Bundled vController Software

Included vController software provides a simple and intuitive interface for remote management, OSD-related settings, and scheduling on deployed displays through RS232 or LAN.



OPS PC Slot

Equipped with Intel's Open Pluggable Specification (OPS), this display provides for cable-free integration and easy installation in any environment. In addition, this display can easily connect to an external media player to bring a multi-media experience to your customers.

Dual Integrated Speakers

Designed with dual integrated speakers, this display combines incredible screen performance with stereo sound for an immersive multimedia experience.



Technical Specifications

LCD PANEL	Panel Size	49"
	Type/Tech	TFT LCD Module. (IPS type, DLED backlight)
	Display Area	1073.8(H) x 604.0 (V) (48.50" diagonal)
	Aspect Ratio	16:9
	Resolution	1920 x 1080
	Colors	10 Bits, 1.07 Billion colors
	Brightness	450 nits (typ.)
	Contrast Ratio	1300:1 Typ.
	Response Time	12ms
	Viewing Angles	H = 178, V = 178 typ.
	Backlight Life	50,000 Hours Typ.
	Surface Treatment	Hard coating(3H), Anti-glare treatment of the front polarizer, Haze 1% (Typ.)
	Orientation	Landscape / Portrait
INPUT	HDMI	x2 (V.1.4)
	RGB / VGA	x1
	DisplayPort	x1
	DVI	x1
	Audio	x1 PC audio(3.5 mm)
	CVBS	x1 (Share with component Y)
	YPbPr	x1
	IR Pass Through	x1
	RS232	x1
	OPS	x1
OUTPUT	DisplayPort	x1

	DVI	x1
	Audio	x1 PC audio(3.5 mm)
	IR Pass Through	x1
	RS232	x1
LAN	RJ45	x1
USB	Type A	x1
SPEAKERS		10 w x2
COMPATIBILITY	RGB PC/HDMI PC	Up to 1920x1080
	CVBS	480i,
	YPbPr	480i, 480p,720p,1080i,1080p
	HDMI	480i, 480p,720p,1080i,1080p, 4k2k@30Hz
	DisplayPort	480i, 480p,720p,1080i,1080p, 4k2k@30Hz
	DVI	480i, 480p,720p,1080i,1080p
USB Media Support Format		Photo: BMP, JPEG, PNG, GIF Video: AVI, MKV, ASF, WMV, MP4, 3GP, VRO, MPG, MPEG Audio: MP3, WMA (V2 up to V9.2), ASF, WMA(WMA Pro), Wav (PC), ALF(MAC), ALFF(MAC), AAC, MP4, M4A
POWER	Voltage	100-240 VAC +/- 10% Wide Range, 50-60Hz +/-3 Hz
	Consumption	110W (typ), 235W (max) < 0.5 W (RS232 in active)
ERGONOMICS	Wall Mount (VESA®)	400x400mm
OPERATING CONDITIONS	Temperature (° C)	5 – 40 °C (Landscape), 5 – 35 °C (Portrait)
	Humidity	20% ~ 80% non-condensing
OPERATING HOUR		24/7
DIMENSIONS (W x H x D)	Physical (inch / mm)	42.43' x 25.54' x 15.75' / 1077.6 x 648.7 x 400 (with Stand) 42.43 'x 23.93' x 3.68' / 1077.6 x 607.8 x 93.5 (w/o Stand)
	Packaging (inch / mm)	53.82' x 35.31' x 14.41' / 1367 x 897 x 366
WEIGHT	Net (lb / kg)	47.62/ 21.6 (w/o stand) 52.69 / 223.9 (w/ stand)
	Gross (lb / kg)	75.62 / 34.3
REGULATIONS		UL/cUL, FCC, Energy Star 7.0, UL-MX-CoC, Mexico Energy
What's in the box?		CDX4952 Commercial Display/Remote Control with batteries/User manual CD wizard / Quick Start Guide / Power Cables /VGA cable / RS232 cable / IR sensor cable/ RS232 daisy chain cable / Edge Alignment Kit-1/ Edge Alignment Kit-2/ Thumb Screw*Actual content may differ from market to market